# 51.2V Wall Mounted LiFePO4 Battery

## 14.34kWh




Flexible installation, saving time and effort

5 years standard warranty

Superior LiFePO4 afety performance

Low voltage safety connection

Max. 16 modules parallel

## • Compatible With Inverter Brands

GenixGreen's battery BMS supports simultaneous communication and compatible with multiple inverter brands


Afore | Deye | SOFAR | SMA | victron energy

invt | LUXPOWER TEK | Growatt | Voltronic Power | solis


© Shenzhen Genixgreen Technology Co.,Ltd All Rights Reserved.

# 51.2V Wall Mounted LiFePO4 Battery

## 14.34kWh

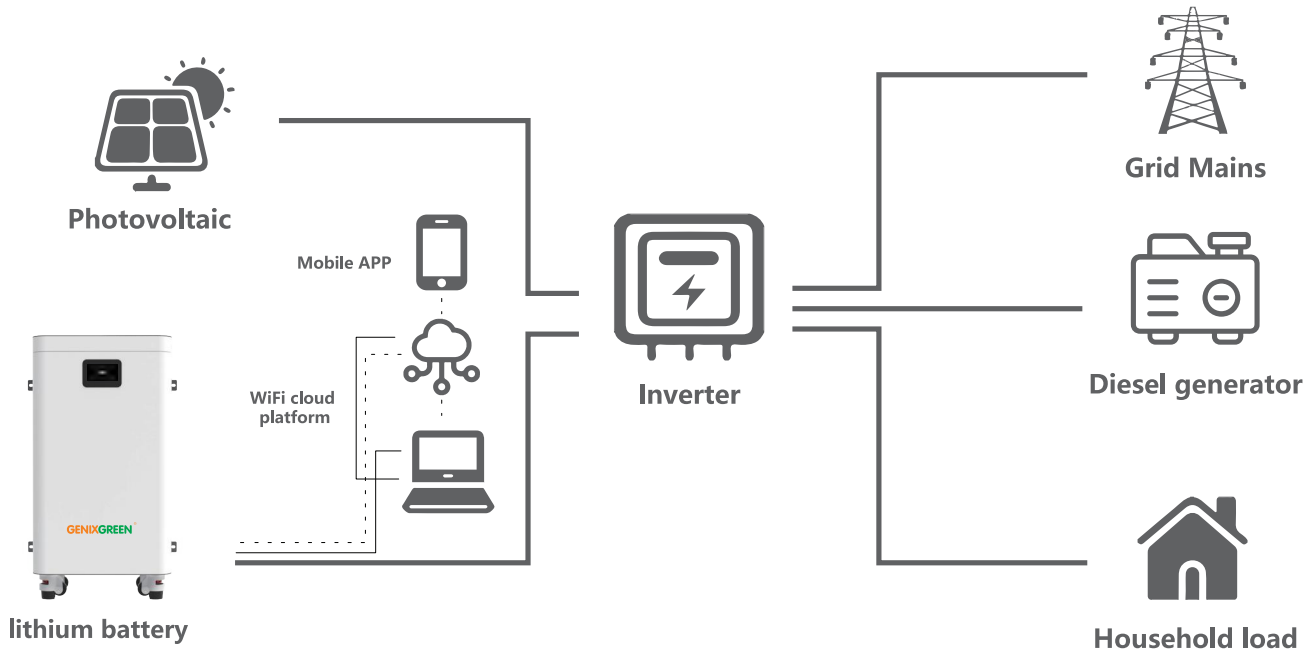


## Parameters

| Product Model | ES-BOX26 MAX |
|---|---|
| Nominal Energy | 14.34kWh |
| Nominal Voltage | 51.2V |
| Nominal Capacity | 280Ah |
| Cell Type | LFP |
| Standard Charge Voltage | 56.8V |
| Max. Discharge Current | 200A |
| Discharge Cut-Off Voltage | 44.8V |
| Parallel Function | Support 16 Units In Parallels |
| Protection Level | IP20 |
| Communication Interface | RS485、USB、CAN |
| Cycle Life * | ≥6000 Cycles (25°C±2°C, 0.2C/0.2C, 80%DOD) |
| Charge Temperature Range | 0~55°C |
| Discharge Temperature Range | -20~55°C |
| Certification | Pack: CEI 0-21/CE/IEC 62619/UL1973 by Intertek/MSDS/UN38.3<br>Cell: UL 1642/IEC 62619/CE/EMC/ROHS/MSDS/UN38.3 |
| Dimension | 495*830*250mm |
| Net Weight | 126Kg/130Kg |
| Installation Method | Wall Mounted/Floor Standing |
| Warranty | 5 Years(Under Warranty Terms) |
| Function | Wi-Fi/Touchable LCD Screen |


© Shenzhen Genixgreen Technology Co.,Ltd All Rights Reserved.